


# 3656A/B/D Vector Network Analyzer

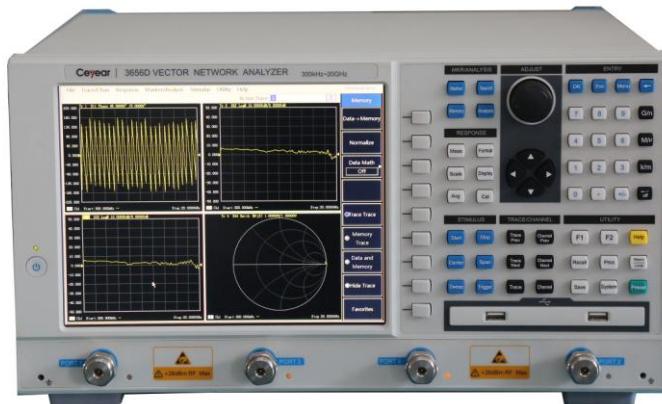

## Product Overview

3656A/B/D vector network analyzer is applicable to fields of radio communications, cable TV, teaching and automotive electronics etc. It can be used for performance measurement of RF components such as filter, amplifier, antenna, cable, and cable television sub connectors etc. It adopts Windows operating system, and has functions of error calibration, time domain and fixture simulator; It supports multiple display formats such as logarithmic amplitude, linear amplitude, standing wave, phase, group delay, Smith chart and polar coordinates etc.; It provides multiple calibration types including frequency response, single port, response isolation, enhanced response and full dual-port, rapid SOLT calibration and electrical calibration; It is capable of multi-channel and multi-window display; It is designed with USB interface, LAN interface, GPIB interface and VGA interface. It can rapidly and accurately measure the amplitude, phase and group delay characteristics of the DUT S-parameter, with efficient and powerful error correction capability.

## Main Characteristics

- Dynamic range up to 125dB; accurate measurement on high rejection ratio devices
- 75Ω test port impedance option of 3656A for cable TV components measurement
- 3656A/B/D provide 4-port option which can accomplish all 16 S parameters test of 4-port net by a single connection


Note: For 4-port option of 3656A/B, it's external device 2813A

- Ultra-low trace noise which provide higher test accuracy

- Up to 64 independent measuring channels that can implement complex testing schemes rapidly
- Powerful data analysis functions, such as ripple test, bandwidth test and limit test, convenient for user to judge the conformity and improves the test efficiency
- Time domain analysis function as the standard configuration
- Fixture simulator can simulate various R&D situations to rapidly get the real-time test results
- LAN and GPIB interface, capable of remote control and system interconnection, 4 USB interfaces


### Wide dynamic range

With dynamic range up to 125dB (IFBW=10Hz), 3656A/B/D is capable of accurate measurement on devices with high rejection ratio.

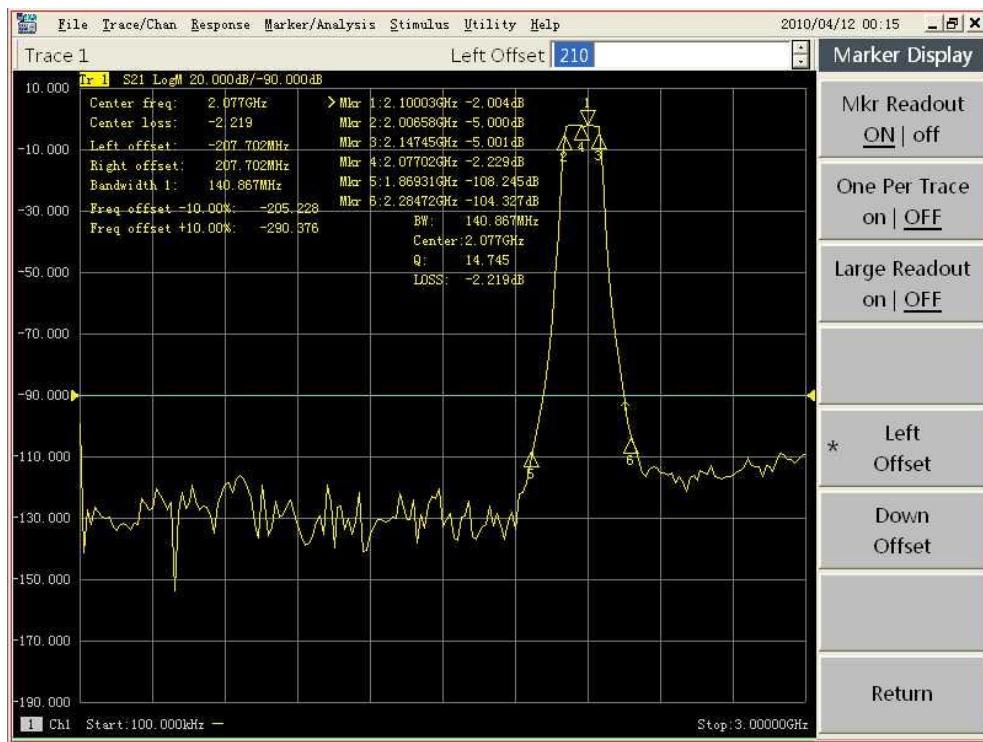


### Ultra-low trace noise

Trace noise of 3656A/B/D is ultra-low, which minimizes measurement error.

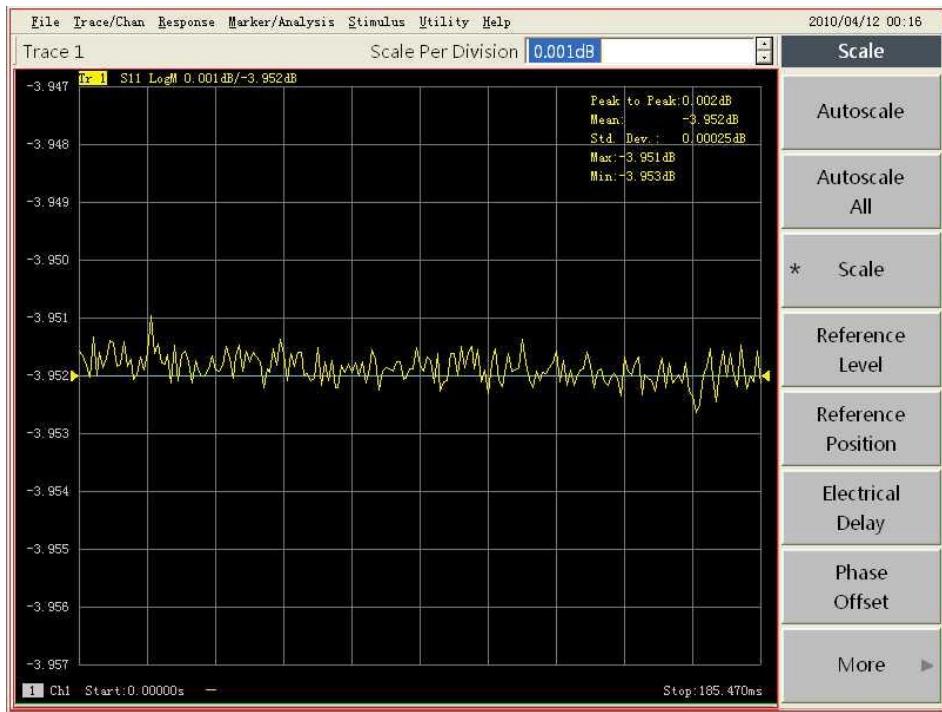


### Time-domain analysis function

The analyzer can conduct time-domain measurement on DUT via time-domain software so as to comprehensively test the performance indicators of DUT, such as cable fault location and length measurement.

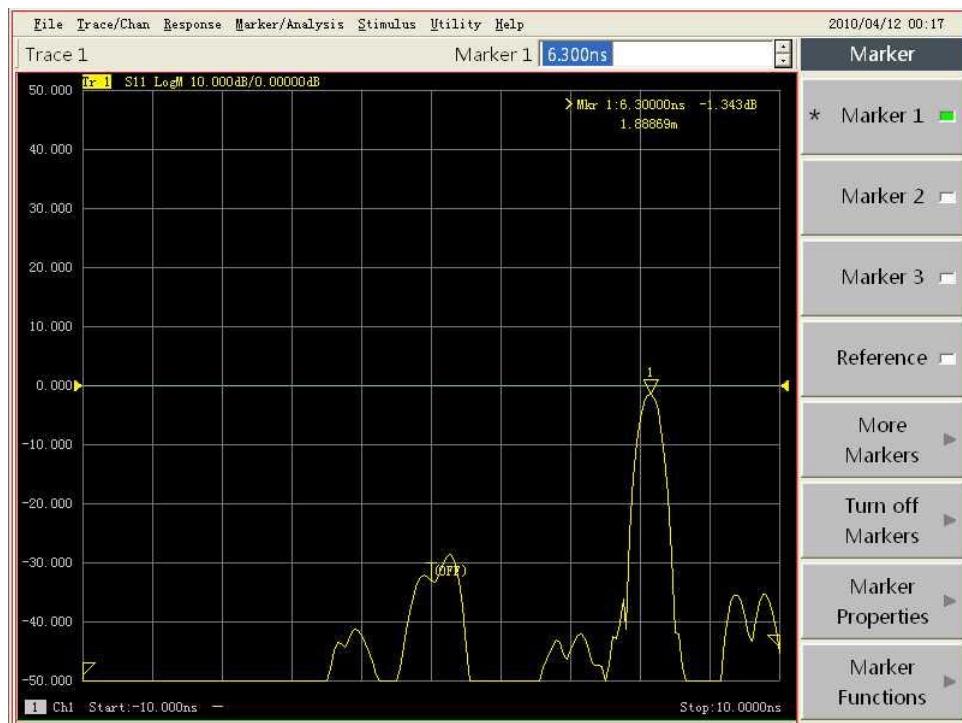

## Powerful data analysis function

It has analysis functions such as limit test, ripple test and bandwidth test, filter automatic statistics etc., which can clearly test the loss, ripple and rejection and help for conduct hopping filter debugging.

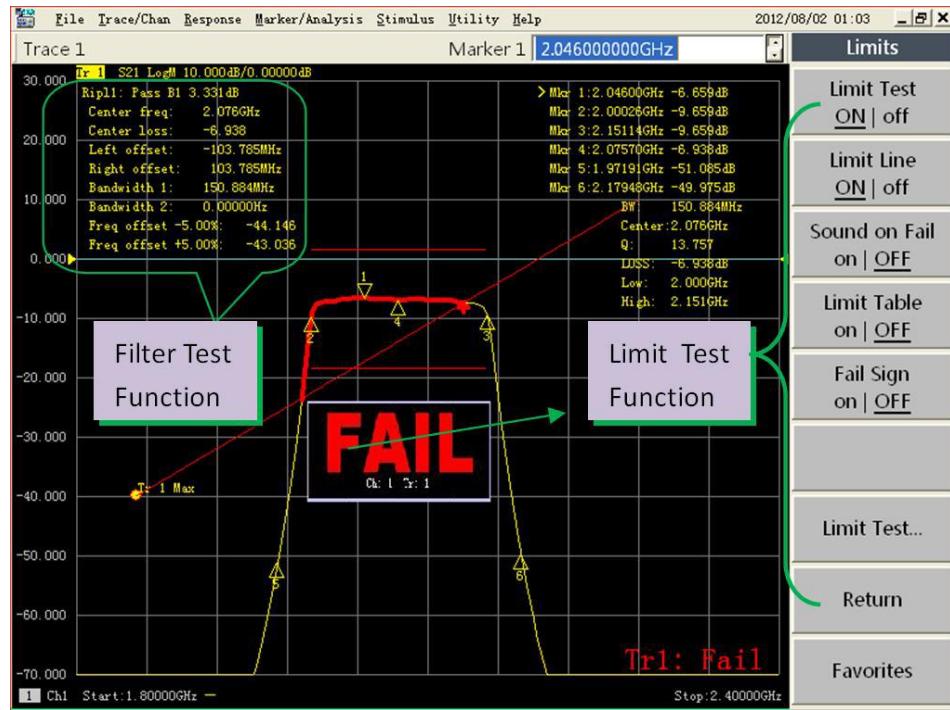

## Typical Applications

### Production test of mobile communication products

The frequency range of 3656A/B/D vector network analyzer can meet the demand of production test on mobile communication products. It has advantages of high sweep speed, wide dynamic range and compact size which is very suitable for the test of mass production in factories.


3656A/B/D can be applied to the test of RF components such as filter, amplifier, antenna and cables. The 75Ω test assembly of 3656A is also available for performance test of CATV devices.



### Test of passive multi-port device and balanced device

3656A/B/D VNA provide 4-port test function . It can test the whole 16 S parameters of 4-port network via one single connection, thus is very suitable for the mass production test of multi-port devices in factories. It has balanced parameter test function: after the full 3-port or full 4-port calibration using 3 or 4 test ports, choose the corresponding operation mode (single port-balanced network, single port-single port-balanced network, balanced-balanced network), then you can gain the mixed S-parameters of balanced devices.

Notes: For 4-port option of 3656A/B, it's external device 2813A

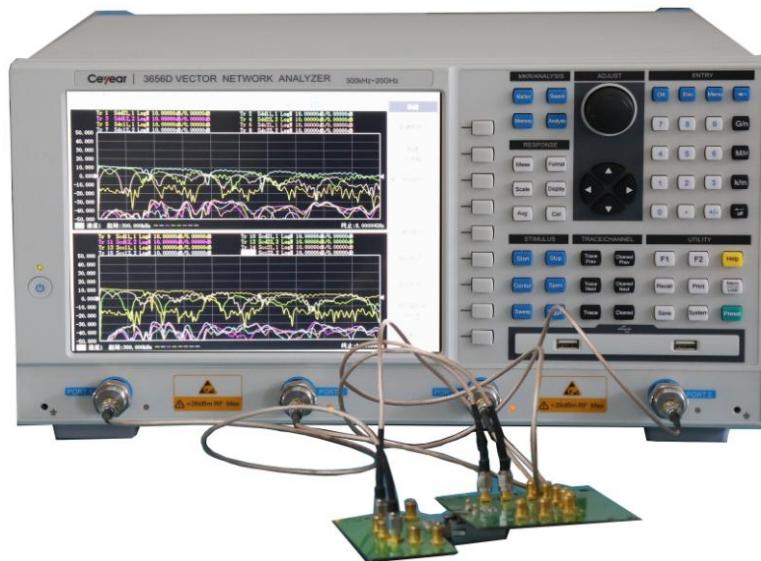

## 3656A/B Technical Specifications

| Parameters | 3656A | 3656B |
|------------|-------|-------|
|------------|-------|-------|

|                                   |                                                                                               |                |              |                                   |                |       |
|-----------------------------------|-----------------------------------------------------------------------------------------------|----------------|--------------|-----------------------------------|----------------|-------|
| Frequency range                   | 100kHz ~ 3GHz                                                                                 |                |              | 100kHz ~ 8.5GHz                   |                |       |
| Frequency resolution              | 1Hz                                                                                           |                |              | 1Hz                               |                |       |
| Frequency accuracy                | $\pm 5 \times 10^{-6}$ (23°C±3°C)                                                             |                |              | $\pm 5 \times 10^{-6}$ (23°C±3°C) |                |       |
| Output power setting range        | -45dBm~+10dBm                                                                                 |                |              | -55dBm~+10dBm                     |                |       |
| System dynamic range              |                                                                                               | (10Hz)         | (3kHz)       | (10Hz)                            | (3kHz)         |       |
|                                   | 100kHz~1MHz                                                                                   | 90dB           | 60dB         | 100kHz~20MHz                      | 110dB          | 80dB  |
|                                   | 1MHz~10MHz                                                                                    | 110 dB         | 80 dB        | 20MHz~3GHz                        | 125 dB         | 95 dB |
|                                   | 10MHz~3GHz                                                                                    | 125dB          | 95dB         | 3GHz~6GHz                         | 123dB          | 93dB  |
| Reflection track                  | 6GHz~8.5GHz                                                                                   | 118dB          | 88dB         |                                   |                |       |
|                                   | 100kHz~10MHz                                                                                  | $\pm 0.030$ dB |              | 100kHz~3GHz                       | $\pm 0.030$ dB |       |
|                                   | 10MHz~3GHz                                                                                    | $\pm 0.020$ dB |              | 3GHz~6GHz                         | $\pm 0.040$ dB |       |
| Transmission track                | 6GHz~8.5GHz                                                                                   | $\pm 0.050$ dB |              |                                   |                |       |
|                                   | 100kHz~10MHz                                                                                  | $\pm 0.030$ dB |              | 100kHz~3GHz                       | $\pm 0.030$ dB |       |
|                                   | 10MHz~3GHz                                                                                    | $\pm 0.020$ dB |              | 3GHz~6GHz                         | $\pm 0.040$ dB |       |
| Effective directivity             | 6GHz~8.5GHz                                                                                   | $\pm 0.050$ dB |              |                                   |                |       |
|                                   | 100kHz~10MHz                                                                                  | 49 dB          |              | 100kHz~3GHz                       | 46dB           |       |
|                                   | 10MHz~3GHz                                                                                    | 46 dB          |              | 3GHz~6GHz                         | 40dB           |       |
|                                   | 100kHz~10MHz                                                                                  | 49dB           | (option H01) | 6GHz~8.5GHz                       | 38dB           |       |
| Effective source match            | 10MHz~3GHz                                                                                    | 46dB           | (option H01) |                                   |                |       |
|                                   | 100kHz~10MHz                                                                                  | 44dB           |              | 100kHz~3GHz                       | 36dB           |       |
|                                   | 10MHz~3GHz                                                                                    | 40dB           |              | 3GHz~6GHz                         | 35dB           |       |
|                                   | 100kHz~10MHz                                                                                  | 43dB           | (option H01) | 6GHz~8.5GHz                       | 33dB           |       |
| Effective load match              | 10MHz~3GHz                                                                                    | 21dB           | (option H01) |                                   |                |       |
|                                   | 100kHz~10MHz                                                                                  | 49 dB          |              | 100kHz~3GHz                       | 44dB           |       |
|                                   | 10MHz~3GHz                                                                                    | 46 dB          |              | 3GHz~6GHz                         | 40dB           |       |
|                                   | 100kHz~10MHz                                                                                  | 48dB           | (option H01) | 6GHz~8.5GHz                       | 36dB           |       |
| Test points                       | 1 to 16001                                                                                    |                |              |                                   |                |       |
| IF bandwidth                      | Min. 1Hz; Max. 5MHz, in 1, 2, 3, 5, 7 step                                                    |                |              |                                   |                |       |
| Port connector type               | Type-N (female) 50 ohm system impedance<br>Type-N (female) 75 ohm system impedance (3656-H01) |                |              |                                   |                |       |
| Number of test ports              | 2                                                                                             |                |              |                                   |                |       |
| Number of test receivers          | 4                                                                                             |                |              |                                   |                |       |
| Reference level amplitude setting | Setting range: $\pm 500$ dB<br>Setting resolution: 0.001dB                                    |                |              |                                   |                |       |
| Reference phase setting           | Setting range: $\pm 500^\circ$<br>Setting resolution: 0.01°                                   |                |              |                                   |                |       |
| Time-base reference output        | Output frequency: 10MHz<br>Output level: +10dBm±4dB                                           |                |              |                                   |                |       |
| Digital interface                 | GPIB, USB, Ethernet interface and VGA display interface                                       |                |              |                                   |                |       |

|                   |                                                                                          |
|-------------------|------------------------------------------------------------------------------------------|
| Operation system  | Windows XP                                                                               |
| Display           | 10.4-inch high brightness LCD                                                            |
| Test domain       | Frequency domain, Time domain                                                            |
| Dimensions        | 435×233×348 (W×H×D) (including foot pad, foot, lateral stripping, input and output port) |
| Power consumption | 150W                                                                                     |
| Power supply      | 50Hz single phase 220V or 50Hz/60Hz single phase 110V AC                                 |
| Weight            | 16kg                                                                                     |

### 3656D Technical Specifications:

|                                            |                                   |          |        |
|--------------------------------------------|-----------------------------------|----------|--------|
| Parameters                                 | 3656D                             |          |        |
| Frequency range                            | 300kHz ~ 20GHz                    |          |        |
| Frequency resolution                       | 1Hz                               |          |        |
| Frequency accuracy                         | $\pm 1 \times 10^{-6}$ (23°C±3°C) |          |        |
| System dynamic range<br>IF bandwidth: 10Hz | Frequency range                   | 2-port   | 4-port |
|                                            | 300kHz~100MHz                     | 95dB     | 90 dB  |
|                                            | 100MHz~1GHz                       | 110dB    | 100 dB |
|                                            | 1GHz~6GHz                         | 120dB    | 115 dB |
|                                            | 6GHz~8GHz                         | 117dB    | 110 dB |
|                                            | 8GHz~10GHz                        | 115dB    | 105 dB |
|                                            | 10GHz~15GHz                       | 110dB    | 100 dB |
| Reflection track                           | 15GHz~20GHz                       | 100dB    | 90 dB  |
|                                            | 300kHz~10MHz                      | ±0.030dB |        |
| Transmission track                         | 10MHz~3GHz                        | ±0.040dB |        |
|                                            | 3GHz~20GHz                        | ±0.050dB |        |
|                                            | 300kHz~10MHz                      | ±0.030dB |        |
|                                            | 10MHz~3GHz                        | ±0.040dB |        |
| Effective directivity                      | 3GHz~6GHz                         | ±0.100dB |        |
|                                            | 6GHz~20GHz                        | ±0.150dB |        |
|                                            | 300kHz~10MHz                      | 46dB     |        |
|                                            | 10MHz~3GHz                        | 42dB     |        |
| Effective source match                     | 3GHz~6GHz                         | 38dB     |        |
|                                            | 6GHz~20GHz                        | 36dB     |        |
|                                            | 300kHz~10MHz                      | 37dB     |        |
|                                            | 10MHz~3GHz                        | 37dB     |        |
| Effective load match                       | 3GHz~6GHz                         | 31dB     |        |
|                                            | 6GHz~20GHz                        | 28dB     |        |
|                                            | 300kHz~10MHz                      | 44dB     |        |
| Effective source match                     | 10MHz~3GHz                        | 42dB     |        |
|                                            | 3GHz~6GHz                         | 38dB     |        |

|                                   |                                                                                            |                          |
|-----------------------------------|--------------------------------------------------------------------------------------------|--------------------------|
|                                   | 6GHz~20GHz                                                                                 | 36dB                     |
| Test points                       | 1 to 16001                                                                                 |                          |
| IF bandwidth                      | Min. 1Hz; Max. 5MHz, in 1, 2, 3, 5, 7 step                                                 |                          |
| Port connector type               | 3.5mm (male) 50 ohm system impedance                                                       |                          |
| Number of test ports              | 2/4                                                                                        |                          |
| Number of test receivers          | 2/4                                                                                        |                          |
| Reference level amplitude setting | Setting range: ±500dB<br>Setting resolution: 0.001dB                                       |                          |
| Reference phase setting           | Setting range: ±500°<br>Setting resolution: 0.01°                                          |                          |
| Time-base reference output        | Output frequency: 10MHz                                                                    | Output level: +10dBm±4dB |
| Digital interface                 | GPIB, USB, Ethernet interface and VGA display interface                                    |                          |
| Operation system                  | Windows XP                                                                                 |                          |
| Display                           | 10.4-inch high brightness LCD                                                              |                          |
| Test domain                       | Frequency domain, Time domain                                                              |                          |
| Dimensions                        | 436×236.5×410 (W×H×D) (including foot pad, foot, lateral stripping, input and output port) |                          |
| Power consumption                 | 150W                                                                                       |                          |
| Power supply                      | 50Hz single phase 220V or 50Hz/60Hz single phase 110V AC                                   |                          |
| Weight                            | 18kg                                                                                       |                          |

### 3656A Ordering Information:

●Main Unit: 3656A Vector Network Analyzer

●Standard Configuration/Option Information

|                        | No.      | Standard Configuration/Option                                                                                                              |
|------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Standard Configuration | ---      | Power cord ,1 piece                                                                                                                        |
|                        | ---      | USB mouse, 1 piece                                                                                                                         |
|                        | ---      | Quick start guide, 1 piece                                                                                                                 |
|                        | ---      | Certificate of conformity , 1 piece                                                                                                        |
|                        | ---      | CD, 1 piece                                                                                                                                |
|                        | 3656-H01 | 75Ω port impedance system<br>Notes: After choosing this option, the main unit will not has 50Ω port impedance system                       |
|                        | 3656-H02 | Type-N testing cable (GORE-OSZKUZKU0240, dual male, 60cm)                                                                                  |
|                        | 3656-H03 | Type-N testing cable (GORE-OSZKUZKV0240, female male, 60cm)                                                                                |
|                        | 3656-H04 | English options (Button, front panel, label)<br>Notes: After choosing this option, the main unit will not has Chinese button, front panel, |

|          |                                                                                                        |
|----------|--------------------------------------------------------------------------------------------------------|
|          | label                                                                                                  |
| 3656-H05 | 20205 Type-N calibration kit (DC~3GHz)                                                                 |
| 3656-H06 | 20204 Type-N 75Ω calibration kit                                                                       |
| 3656-H07 | Economical stable phase testing cable CETC41-N/J.SMA/J.197C-800(N to 3.5mm connector, dual male, 80cm) |
| 3656-H08 | Economical stable phase testing cable CETC41-N/J.N/K.197C-800(N type connector, female-male, 80cm)     |
| 3656-H09 | Economical stable phase testing cable CETC41-N/J.N/J.197C-800(N type connector, dual male, 80cm)       |
| 3656-H10 | 75Ω testing cable 24-0800-51M1-51M1                                                                    |
| 3656-H11 | 20402 Electronic calibration kit (300kHz~18GHz, Type-N (female-male), 2-port)                          |
| 3656-H12 | 20403 Electronic calibration kit (10MHz~26.5GHz, 3.5mm (female-male), 2-port)                          |
| 3656-H13 | 20405 Electronic calibration kit (10MHz~20GHz, 3.5mm (female), 4-port)                                 |
| 3656-H14 | 3656 series user manual in Chinese                                                                     |
| 3656-H15 | 3656 series user manual in English                                                                     |
| 3656-H16 | Aluminum alloy transportation case                                                                     |
| 3656-H17 | Front panel jumper (Supports 4-port extension and receiver through test)                               |
| 3656-H18 | 2813A 4-port test equipment (Need option 3656A-H17)                                                    |
| 3656-H19 | Cabinet, easy to build system                                                                          |

## 3656B Ordering Information

•Main Unit: 3656B Vector Network Analyzer

•Standard Configuration/Option Information

|                        | No.      | Standard Configuration/Option                                                                               |
|------------------------|----------|-------------------------------------------------------------------------------------------------------------|
| Standard Configuration | ---      | Power cord ,1 piece                                                                                         |
|                        | ---      | USB mouse, 1 piece                                                                                          |
|                        | ---      | Quick start guide, 1 piece                                                                                  |
|                        | ---      | Certificate of conformity , 1 piece                                                                         |
|                        | ---      | CD, 1 piece                                                                                                 |
| Option                 | 3656-H02 | Type-N testing cable (GORE-OSZKUZKU0240, dual male, 60cm)                                                   |
|                        | 3656-H03 | Type-N testing cable (GORE-OSZKUZKV0240, female-male, 60cm)                                                 |
|                        | 3656-H07 | Economical stable phase testing cable CETC41-N/J.SMA/J.197C-800(Type-N to 3.5mm connector, dual male, 80cm) |
|                        | 3656-H08 | Economical stable phase testing cable CETC41-N/J.N/K.197C-800(Type-N connector, female-male, 80cm)          |
|                        | 3656-H09 | Economical stable phase testing cable CETC41-N/J.N/J.197C-800(Type-N connector, dual male, 80cm)            |
|                        | 3656-H11 | 20402 Electronic calibration kits (300kHz~18GHz, Type-N (female-male), 2 port)                              |
|                        | 3656-H12 | 20403 Electronic calibration kits (10MHz~26.5GHz, 3.5mm (female-male), 2 port)                              |
|                        | 3656-H13 | 20405 Electronic calibration kits (10MHz~20GHz, 3.5mm(female), 4 port)                                      |

|  |          |                                                                                                                                                   |
|--|----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 3656-H14 | 3656 series user manual in Chinese                                                                                                                |
|  | 3656-H15 | 3656 series user manual in English                                                                                                                |
|  | 3656-H16 | Aluminum transportation case                                                                                                                      |
|  | 3656-H18 | 2813A 4-port test equipment (Need option 3656B-H29)                                                                                               |
|  | 3656-H19 | Cabinet, Easy to build system                                                                                                                     |
|  | 3656-H20 | English options (Button, front panel, label)<br>Notes: After choosing this option, the main unit will not have Chinese button, front panel, label |
|  | 3656-H21 | 20201 Type-N calibration kit (DC~9GHz)                                                                                                            |
|  | 3656-H22 | 20202 3.5mm calibration kit (DC~9GHz)                                                                                                             |
|  | 3656-H23 | 32111 waveguide calibration kit (1.72~2.61GHz)                                                                                                    |
|  | 3656-H24 | 32112 waveguide calibration kit (2.60~3.95GHz)                                                                                                    |
|  | 3656-H25 | 32113 waveguide calibration kit (3.94~6.00GHz)                                                                                                    |
|  | 3656-H26 | 32114 waveguide calibration kit (4.64~7.05GHz)                                                                                                    |
|  | 3656-H27 | 32115 waveguide calibration kit (5.88~8.17GHz)                                                                                                    |
|  | 3656-H28 | 32116 waveguide calibration kit (7.00~10.0GHz)                                                                                                    |
|  | 3656-H29 | Front panel jumper (Supports 4-port extension and receiver through test)                                                                          |

## 3656D Ordering Information

• Main Unit: 3656D Vector Network Analyzer

• Standard Configuration/Option Information

|                        | No.      | Standard Configuration/Option          |
|------------------------|----------|----------------------------------------|
| Standard Configuration | ---      | Power cord ,1 piece                    |
|                        | ---      | USB mouse, 1 piece                     |
|                        | ---      | Quick start guide, 1 piece             |
|                        | ---      | Certificate of conformity , 1 piece    |
|                        | ---      | CD, 1 piece                            |
| Option                 | 3656-H12 | 20403 Electronic calibration kits      |
|                        | 3656-H13 | 20405 Electronic calibration kits      |
|                        | 3656-H14 | 3656 series user manual in Chinese     |
|                        | 3656-H15 | 3656 series user manual in English     |
|                        | 3656-H19 | Cabinet                                |
|                        | 3656-H30 | 31121 3.5mm calibration kits           |
|                        | 3656-H31 | 87308 3.5NMD/3.5mm-KJ testing cable    |
|                        | 3656-H32 | 87308A 3.5NMD/3.5mm-KK testing cable   |
|                        | 3656-H33 | FB0HA0HB025.0 3.5mm GORE testing cable |
|                        | 3656-H34 | FB0HA0HC025.0 3.5mm GORE testing cable |
|                        | 3656-H35 | 2-port English option                  |
|                        | 3656-H36 | 4-port option                          |
|                        | 3656-H37 | 4-port English option                  |

|  |          |                              |
|--|----------|------------------------------|
|  | 3656-H38 | Aluminum transportation case |
|--|----------|------------------------------|

## 2813A Technical Specifications

|                              |                                                                                               |       |
|------------------------------|-----------------------------------------------------------------------------------------------|-------|
| Parameters                   | 2813A                                                                                         |       |
| Frequency range              | 100kHz ~ 8.5GHz                                                                               |       |
| Stimulus channel flatness    | $\pm 2.50\text{dB}$                                                                           |       |
| The initial port directivity | 100kHz~10MHz                                                                                  | 10dB  |
|                              | 10MHz~3GHz                                                                                    | 15dB  |
|                              | 3GHz~6GHz                                                                                     | 13dB  |
|                              | 6GHz~8.5GHz                                                                                   | 12dB  |
| Port VSWR                    | 2.0                                                                                           |       |
| Port isolation               | 100kHz~20MHz                                                                                  | 105dB |
|                              | 20MHz~8.5GHz                                                                                  | 115dB |
| Port connector type          | Type-N (female) 50 ohm system impedance                                                       |       |
| Number of test ports         | 4                                                                                             |       |
| Dimensions (2831A)           | 435mm*102mm*364mm(W×H×D) (including foot pad, foot, lateral stripping, input and output port) |       |
| Power consumption (2831A)    | 15W                                                                                           |       |
| Power input (2813A)          | 50Hz single phase 220V or 50Hz/60Hz single phase 11V AC                                       |       |
| Weight (2813A)               | 8.0kg                                                                                         |       |

## 2813A +3656A/B Ordering Information

- Main Unit: 2813A S Parameter Test Equipment

3656A/B Vector Network Analyzer H18 Option

- Standard Configuration/Option Information

|                        | No. | Standard Configuration/Option                                                               |
|------------------------|-----|---------------------------------------------------------------------------------------------|
| Standard Configuration | --- | Power cord ,1 piece                                                                         |
|                        | --- | USB mouse, 1 piece                                                                          |
|                        | --- | Semi-rigid cable , 6 pieces (2 pieces with Type-N connector, 4 pieces with 3.5mm connector) |
|                        | --- | 3.5mm torque wrench, 1 piece                                                                |
|                        | --- | 2813A Quick start guide, 1 piece                                                            |
|                        | --- | Certificate of conformity, 1 piece                                                          |

|                         |           |                                                             |
|-------------------------|-----------|-------------------------------------------------------------|
|                         | ---       | CD, 1 piece                                                 |
| General Options         | 2813A-H01 | Type-N testing cable (GORE-OSZKUZKU0240, dual male, 60cm)   |
|                         | 2813A-H02 | Type-N testing cable (GORE-OSZKUZKV0240, female-male, 60cm) |
|                         | 2813A-H03 | 2813A user manual in Chinese                                |
| 3656A<br>4-port options | 2813A-H04 | 20205 Type-N calibration kit (DC~3GHz)                      |
| 3656B<br>4-port options | 2813A-H05 | 20201 Type-N calibration kit (DC~9GHz)                      |
|                         | 2813A-H06 | 20202 3.5mm calibration kit (DC~9GHz)                       |

---

